


# YEALINK T46G



THE SIP-T42G IS A FEATURE-RICH SIP PHONE FOR BUSINESS. THE 3-LINE IP PHONE HAS BEEN DESIGNED BY PURSUING EASE OF USE IN EVEN THE TINIEST DETAILS. DELIVERING A SUPERB SOUND QUALITY AS WELL AS RICH VISUAL EXPERIENCE. SUPPORTS SEAMLESS MIGRATION TO GIGE-BASED NETWORK INFRASTRUCTURE. WITH PROGRAMMABLE KEYS, THE IP PHONE SUPPORTS VAST PRODUCTIVITY-ENHANCING FEATURES. USING STANDARD ENCRYPTION PROTOCOLS TO PERFORM HIGHLY SECURE REMOTE PROVISIONING AND SOFTWARE UPGRADES.

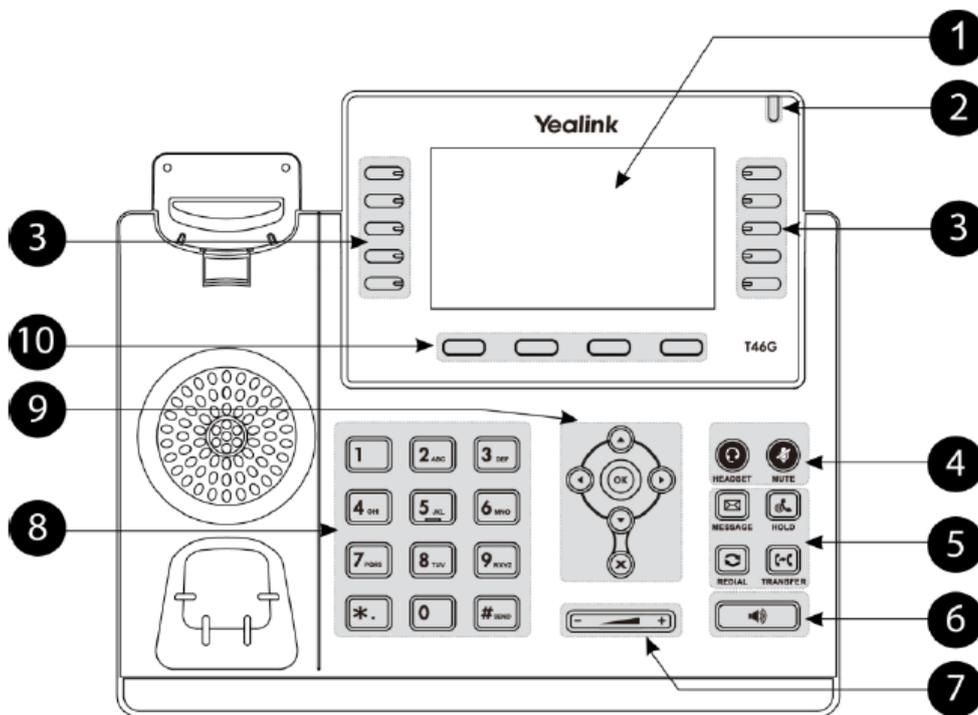

## HANDSET COMPONENT

	ITEM	DESCRIPTION
1	LCD Screen	Shows information about calls, messages, soft keys, time, date and other relevant data: <ul style="list-style-type: none"> <li>- Call information – caller ID, call duration</li> </ul>

		<ul style="list-style-type: none"> <li>- Icons (for example, )</li> <li>- Missed call test or second incoming caller information</li> <li>- Prompt test [for example, "saving config file"]</li> <li>- Time and date</li> </ul>
2	Power Indicator LED	Indicates phone power and some features statuses.
3	Line Keys	Use these keys to activate up to three accounts and assign various features
4	Mute Key	Toggles and indicates mute feature
	Headset Key	Toggles and indicates the headset mode
5	Message Key	Accesses voice messages
	Hold Key	Places a call on hold or resumes a held call
	Redial Key	Redials a previously dialled number
	Transfer Key	Transfers a call to another party
6	Speakerphone Key	Toggles the hands free speakerphone mode
7	Volume Key	Adjust the volume of the handset, headset, speaker and ringer
8	Keypad	Provides the digits, letters and special characters in context-sensitive applications
9		Scroll through the displayed information
		Confirms actions or answers incoming calls
		Cancels actions or rejects incoming calls
<b>10</b>	Soft Keys	Label automatically to identify their context-sensitive features

## HANDSET ICONS

Icon	Description
	Network is unavailable
	Registered successfully
	Registered failed
	Registering
	Hands – free speakerphone mode
	Handset mode
	Headset mode
	Voice Mail
	Auto Answer
	Do Not Disturb
	Call Hold
	Call Mute

	Ringer volume is 0
	Keypad lock
	Alphanumeric input mode
	Numeric input mode
	Multi-lingual lowercase letters input mode
	Multi-lingual uppercase letters input mode
	Multi-lingual uppercase and lowercase letters input mode
	Call Forward/Forwarded Calls
	Missed Calls
	Received Calls
	Placed Calls
	Recording box is full
	A call cannot be recorded
	Recording starts successfully
	Recording cannot be started

	Recording cannot be stopped
	Text Message
	Bluetooth
	Bluetooth headset is both paired and connected
	Conference
	The contact icon
	The default caller photo

## TIPS FOR USING YOUR HANDSET

- MAKING A CALL

You can place a call in three ways

- Using the handset
- Using the speakerphone
- User the headset

You can also dial the number first, and then choose the way you want to speak to the other party.

To place a call using the handset

1. Pick up the handset
2. Enter the desired number using the keypad
3. Press ok or the send soft key

To place a call using the hands-free speakerphone mode:

Do one of the following

1. With the handset on hook press the speaker button or the link key to obtain a dial tone. Enter the desired number and press ok or the send soft key
2. With the handset on hook, enter the desired number using the keypad, press the speaker button, ok or the send soft key

#### ANSWERING A CALL

When you are not in another call, you can answer a call in three ways

- Using the handset
- Using the speaker phone
- Using the headset

Answering when not in another call

Call duration and destination will always appear on the LCD screen for the active call

To answer a call using the handset

1. Pick up the handset

To answer a call when using the hands-free speakerphone mode

Do one of the following

1. Press the speaker phone button
2. With the handset on hook and the headset mode deactivated press the answer soft key
3. With the handset on hook and the headset mode deactivated, press the link key [the line key LED flashes green]

#### TO ANSWER A CALL USING THE HEADSET

Do one of the following

1. Press the headset button
2. With the headset mode activated press the answer soft key
3. With the headset mode activated, press the line key [the line key LED flashes green]

## ANSWERING WHEN IN ANOTHER CALL

If you have an activate call, and an incoming call arrives on the phone, do one of the following

1. Press the answer soft key
  - a. The incoming call is answered and the original call is places on hold
2. Press the down key to access the new call, press ok or the answer soft key
  - a. The incoming call is answered and the original call is placed on hold.

- **MUTING A CALL**

You can mute the microphone of the active audio device during an active call, and then the other party cannot hear you.

### TO MUTE A CALL

- Press  during an active call.
- The mute key LED illuminates solid red
- The LCD screen indicates that the call is on mute

### TO UNMUTE A CALL

- Press  again to unmute the call
- The mute key LED goes out

- **VOLUME ADJUSTMENT**

- During the call, you can press the volume adjustment bars to adjust the volume

- **PUTTING A CALL ON HOLD**

To place a call on hold

1. Press the Hold soft key during a call
  - a. The line key LED flashes green.
  - b. The LCD screen indicates that the call is on hold.

- CALL TRANSFER

You can transfer a call to another party in one of three ways

- Blind Transfer: transfer a call directly to another party without consulting
- Semi-announced transfer: transfer a call when the target phone is ringing
- Announced Transfer: transfer a call with prior consulting

**BLIND TRANSFER:**

- Press the Tran soft key during a call
- Enter the number you want to transfer the call to
- Press the Tran soft key to complete the transfer
- Then the call is connected to the number to which you are transferrin

**SEMI - ANNOUNCED TRANSFER:**

- Press the Tran soft key during a call
- Do one of the following
  - o Enter the number you want to transfer the call to
  - o Press the directory soft key, and then select local directory. Select the desired group and search for the contact
  - o Press the directory soft key and then select history. Select the desired list and use the up and down keys to select the entry
  - o Press the directory soft key, and then select remote phone book. Select the desired group and search for the contact
- Press ok or send to dial out
- Press the Tran soft key to complete the transfer when receiving ring back
- After C answered it, A and C can have a private conversation without B hearing it, then A hung up or press the TRAN button to complete the transfer

**ANNOUNCED TRANSFER:**

- Press the Tran soft key during a call

- Do one of the following
  - Press the directory soft key, and then select local directory. Select the desired group and search for the contact
  - Press the directory soft key and then select history. Select the desired list and use the up and down keys to select the entry
  - Press the directory soft key and then select remote phone book. Select the desired group and search for the contact
- Press ok or send to dial out
- After the party answers the call, press the Tran soft key to complete the transfer.

#### POWER INDICATOR LED

LED STATUS	DESCRIPTION
Solid Red	The phone is initializing
Flashing red	The phone is ringing
Slow flashing red	The phone received a voice mail
Off	<ul style="list-style-type: none"> <li>• The phone is powered off</li> <li>• The phone is idle</li> <li>• The phone is busy</li> <li>• The call is placed on hold or is held</li> <li>• The call is mute</li> </ul>

#### LINE KEY LED

LED STATUS	DESCRIPTION
Solid green	<ul style="list-style-type: none"> <li>• The line is seized</li> <li>• The line is in conversation</li> </ul>
Fast flashing green	The line receives an incoming call

Slow flashing green	The call is placed on hold
Off	The line is inactive

#### LINE KEY LED (CONFIGURED AS A BLF)

LED STATUS	DESCRIPTION
Solid Green	The monitored user is idle
Fast flashing red	The monitored user receives an incoming call
Solid Red	The monitored user is busy
Slow flashing red	<ul style="list-style-type: none"> <li>The call is parked against the monitored users phone number</li> <li>The monitored users conversation is placed on hold</li> </ul>
Off	The monitored user does not exist

#### LINE KEY LED (USED AS A PAGE SWITCH KEY)

LED Status	Description
Solid Red	There is a parked call on the line key of the non-current page
Solid green	There is a call on the line key of the noncurrent page
Fast flashing green	The line receives an incoming call on the non-current page
Fast flashing red	The monitored user receives an incoming call on the non-current page
Off	Line keys on every page are idle